


ST 2SC4378U

NPN Silicon Epitaxial Planar Transistor



1.Base 2.Collector 3.Emitter
SOT-89 Plastic Package


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	80	V
Collector Emitter Voltage	V_{CEO}	60	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Peak Collector Current	I_{CP}	2	A
Total Power Dissipation	P_{tot}	0.5 1 ¹⁾	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

¹⁾ When mounted on a 250 mm² X 0.8 t ceramic substrate.

Characteristics at $T_a = 25^\circ\text{C}$









Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 2 \text{ V}$, $I_C = 50 \text{ mA}$	h_{FE}	100	-	200	-
	h_{FE}	160	-	320	-
	h_{FE}	30	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	I_{CBO}	-	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 4 \text{ V}$	I_{EBO}	-	-	100	nA
Collector Emitter Breakdown Voltage at $I_C = 1 \text{ mA}$	$V_{(BR)CEO}$	60	-	-	V
Collector Emitter Saturation Voltage at $I_C = 500 \text{ mA}$, $I_B = 50 \text{ mA}$	$V_{CE(sat)}$	-	-	0.5	V
Base Emitter Saturation Voltage at $I_C = 500 \text{ mA}$, $I_B = 50 \text{ mA}$	$V_{BE(sat)}$	-	-	1.2	V
Transition Frequency at $V_{CE} = 10 \text{ V}$, $I_C = 50 \text{ mA}$	f_T	-	150	-	MHz
Collector Output Capacitance at $V_{CB} = 10 \text{ V}$, $f = 1 \text{ MHz}$	C_{ob}	-	12	-	pF



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



ST 2SC4378U

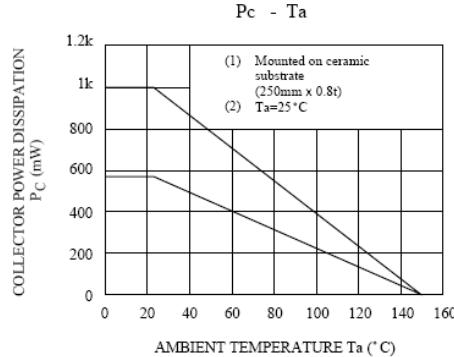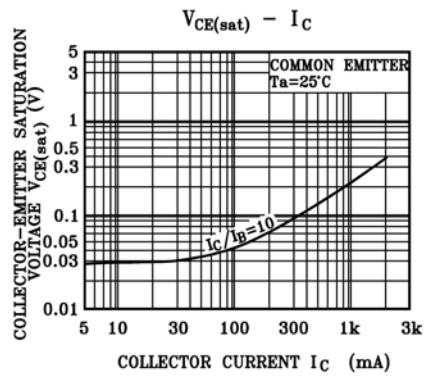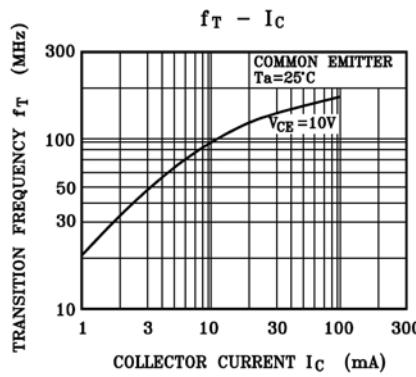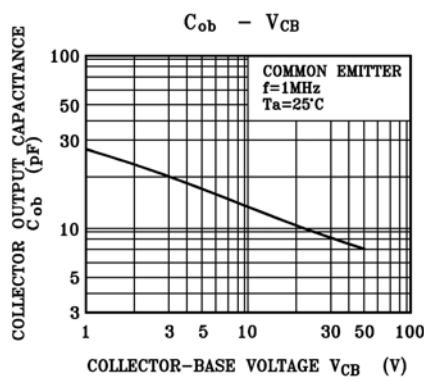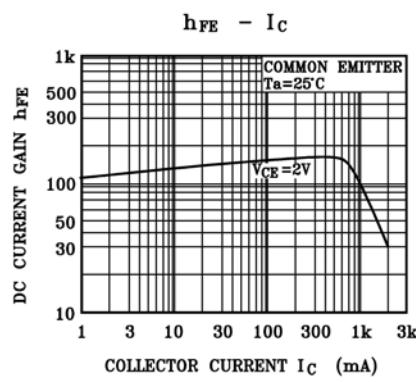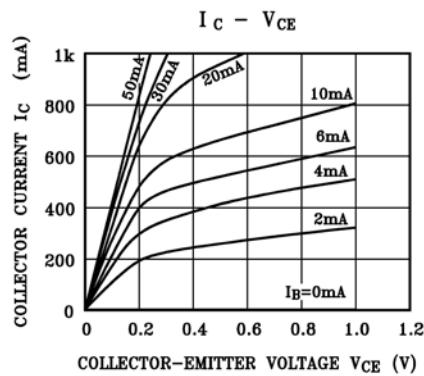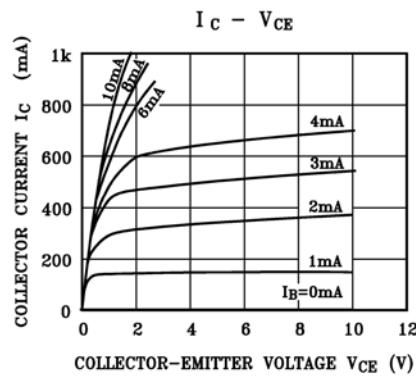


SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




ST 2SC4378U

SOT-89 PACKAGE OUTLINE

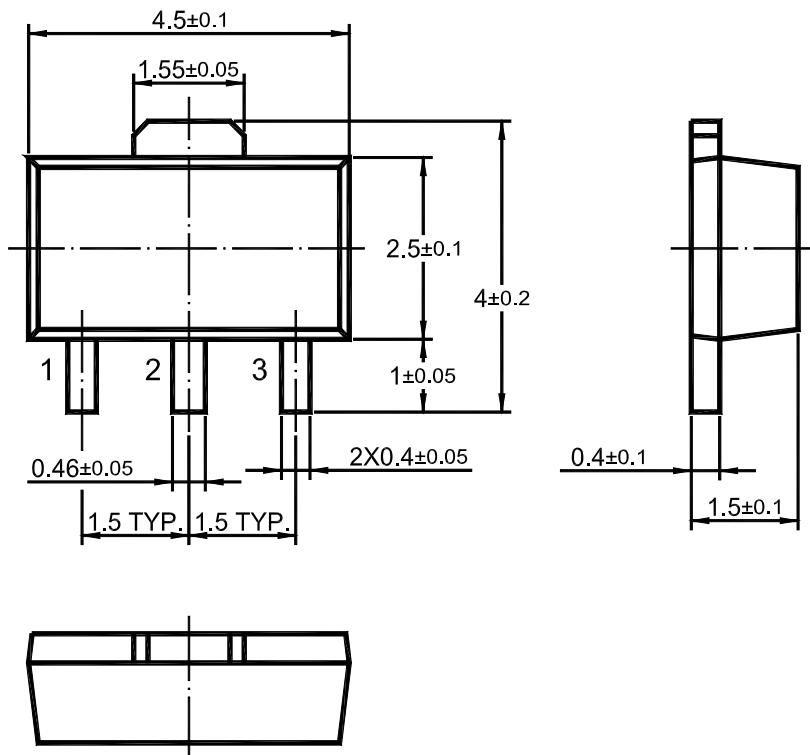

Dimensions in mm



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 04/12/2010 Rev:01